



TYPICAL WALKWAY SECTION

NOTES:


1. Welded type grating shall have $1/4"$ x $1/8"$ bearing bars at $1 3/16"$ centers with $1/4"$ diameter (or equal) cross bars at 4" centers. If mechanical lock grating is used, it shall be equal in strength to the welded type. Alternate hold-down clips may be submitted for approval.
2. Walkway grating to be continuous (no splices) over as many walkway brackets as practical and consistent with fabrication, ease of handling and assembly.
3. Interior grating shall be installed for project requiring backside walkways.

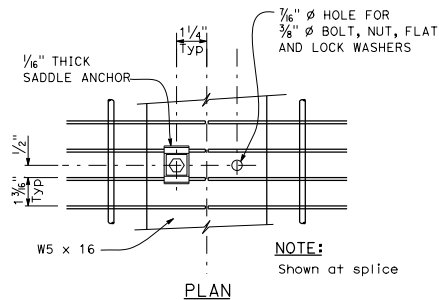

EXTERIOR WALKWAY GRATING DETAILS

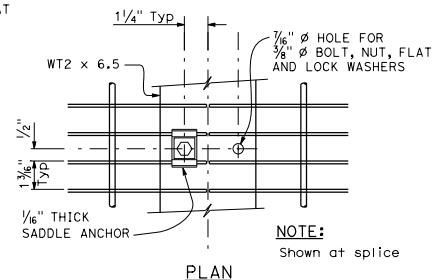


INTERIOR WALKWAY GRATING DETAILS

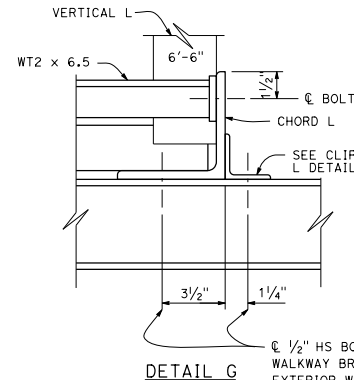


DETAIL G


ϕ $1/2"$ HS BOLT FOR INTERIOR WALKWAY BRACKETS ONLY. FOR EXTERIOR WALKWAY BRACKETS, DRILL $9/16"$ HOLE FOR $3/4"$ ϕ HS BOLT, NUT, 2 FLAT WASHERS AND ONE LOCK WASHER. SNUG TIGHTEN ASSEMBLIES.

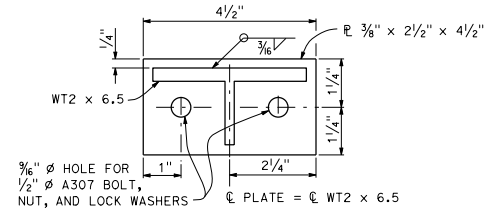


END PLATE CONNECTOR DETAIL

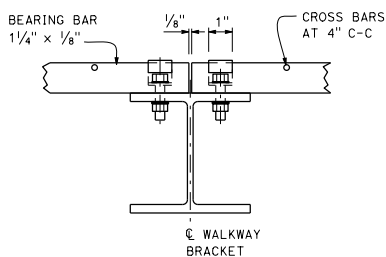

SECTION D-D

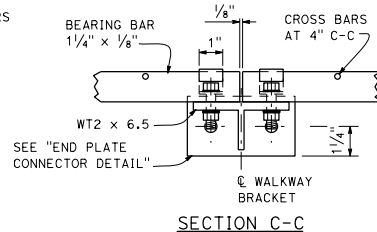

SECTION C-C

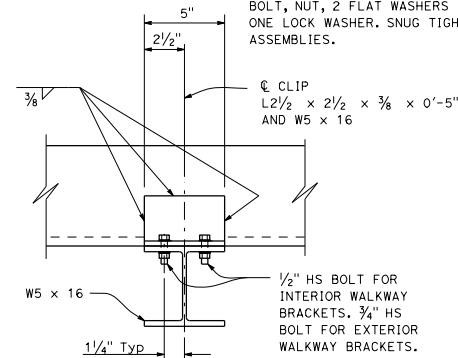

CLIP L DETAIL

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION
**OVERHEAD SIGN-TRUSS
SINGLE POST TYPE
WALKWAY DETAILS
CHANGEABLE MESSAGE SIGNS
MODEL 500**
NO SCALE

S114

DIS+	COUNTY	ROUTE	POST MILES	SHEET TOTAL
			TOTAL PROJECT	No. SHEETS
REGISTERED CIVIL ENGINEER May 31, 2018 PLANS APPROVAL DATE THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.				
Andrew A. Bul No. C63560 Exp. 9-30-18 CIVIL STATE OF CALIFORNIA				